

User Manual



USB 2.0 enclosure ALU for 3.5" IDE HDD silver (AIX-IUB3A-S) / black (AIX-IUB3A-B)

Package Contents

In the box you will find:

- USB 2.0 enclosure ALU for 3.5" IDE harddisks
- USB 2.0 cable
- AC-Power Adaptor 5V/12V
- Power cord for power adaptor
- Mounting Rails to install the harddisk
- Vertical Stand for the enclosure
- Screwdriver
- Driver CD for Win98 SE

If there are any parts missing, please contact your dealer!

Installation of a 3.5" IDE harddisk




Only use in dry locations. Only use with provided power supply. Do not open power supply!

- a) Remove the screws with the provided screwdriver at the back of the enclosure and pull out the backplane carefully.
- b) Plug in the mounting rails on the harddisk.

Please be sure, that the harddisk is configured as MASTER.

- c) Connect the 80pin data-cable and the 4pin power-cable of the backplane to the harddisk. Both plugs are protected against polarity reversal and should be easily connected to the harddisk. If not, please check if you use the plugs in the right way.
- d) Carefully insert the harddisk with the attached backplane into the enclosure.
- e) Fix the mounting screws carefully. Do not fix the screws too tightly to prevent any damages.
- f) With the provided USB-cable, now connect the USB-port of your PC (recommended USB 2.0 for full speed) and the USB-port of the enclosure

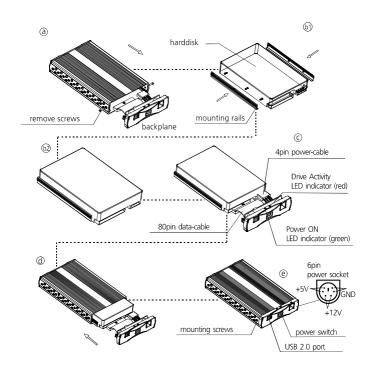

- g) Plug in the power cord of the power adaptor in an adequate outlet (100-240VAC) and connect the 6pin-connector of the power adaptor to the enclosure
- h) Now, power on the enclosure! If you use Windows ME/2000/XP, MAC OS Version 9.0 above or an actual LINUX-distribution, your harddisk will be recognized automatically by the operating system.

For Win98 SE an additional driver must be installed from the provided Driver CD.



Driver Installation for Win98 SE

After recognizing the enclosure as "New Device" please select "search for available driver" and confirm with "Next".

Then choose "Specify a location" und insert the provided DRIVER CD into your CD-ROM.

Select the path **DRIVERS/CYPRESS**.

Confirm the following two boxes with "Next" and the Cypress-Driver for your enclosure will be installed.

Additional Hints / Troubleshooting

- If you use a brand-new harddisk, it is necessary to partition and format the harddisk. Please follow the instructions of your operating system.
- To prevent data loss, you should always use the function "Safely remove" if you want to remove the enclosure during running PC.
- Your enclosure is equipped with a modern Cypress-Chipset and will work with all current IDE harddisks. If you find a brand-new harddisk which is not recognized by your PC, please try to change the configuration of the harddisk from MASTER to SLAVE or CABLE SELECT.
- Some harddisks become very hot during operation. To prevent malfunction/damage we recommend to use an adequate cooling for the enclosure especially in hot environments, or to use another harddisk type.

Actual drivers, support information and information about other aixcase-products you will find at our website

http://www.aixcase.com.

